




trygonal

Rod Seal TS10T

Hydraulics, single acting


Housing design (split housing design required)

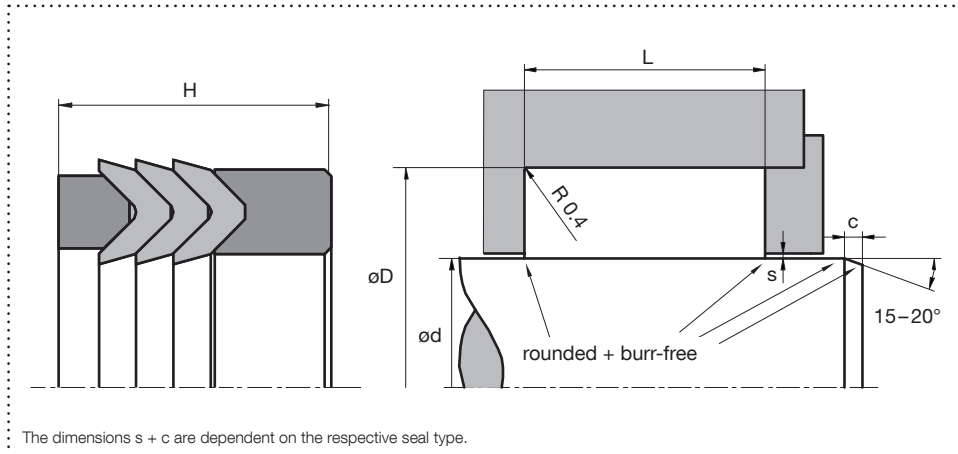

Design

- Set of roof sleeves in twisted design
- Particularly stable design for heavy hydraulics

Application



Brightened symbols:
Seal only for limited use.
Please contact us.

Surface finish

Roughness	Rtmax (µm)	Ra (µm)	Material portion
Sliding surface	≤ 2,5	0,1 – 0,5	Ratio contact area: 50 – 95% at a cutting depth of 0.5 x Rz starting from Cref = 0%
Groove base	≤ 6,3	≤ 1,6	
Groove flanks	≤ 15	≤ 3	

Standard dimensions

ød f8 (mm)	øD H10 (mm)	L + 0,2 (mm)	H = L (mm)	c (mm)	s ¹ (mm)
≥ 10 – < 40	d + 10	16	H = L	4	0,25
≥ 40 – < 75	d + 15	25	H = L	5	0,38
≥ 75 – < 150	d + 20	32	H = L	6	0,50
≥ 150 – < 200	d + 25	40	H = L	8,5	0,63
≥ 200 – < 300	d + 30	50	H = L	10	0,75
≥ 300	d + 40	63	H = L	13	1,00

¹The specified extrusion gap is valid up to 70 °C, higher temperatures require lower values.

Material and application parameters

Press. ring TS10TD	Sleeve TS10TV	Support ring TS10TS	Temp. (°C)	max. sliding speed (m/s)	max. pressure ²
POM diet, PA6G ³	HPU premium	POM, PA6G ³	-30 – +100	0,5	500 bar (50 MPa)
POM diet, PA6G ³	HPU diet	POM, PA6G ³	-20 – +100	0,5	500 bar (50 MPa)
POM diet, PA6G ³	HPU lubric	POM, PA6G ³	-20 – +100	0,7	500 bar (50 MPa)
POM diet, PA6G ³	HPU taiga	POM, PA6G ³	-40 – +100	0,5	500 bar (50 MPa)
XHPU solid	HPU premium	XHPU solid	-30 – +100	0,5	500 bar (50 MPa)
POM	HPU diet	POM	-20 – +100	0,5	500 bar (50 MPa)
XHPU lubric	HPU lubric	XHPU lubric	-20 – +100	0,7	500 bar (50 MPa)
PTFE glass wear	NBR standard	PTFE glass wear	-30 – +100	0,5	250 bar (25 MPa)
PTFE glass wear	FPM diet br	PTFE glass wear	-20 – +200	0,5	250 bar (25 MPa)
PTFE glass wear	EPDM spring	PTFE glass wear	-50 – +150	0,5	250 bar (25 MPa)
PTFE glass wear	HNBR diet	PTFE glass wear	-25 – +150	0,5	250 bar (25 MPa)

²Pressure values as a function of the gap dimension. ³ ≤ ø280mm: POM ; > ø280mm: PA6G

The specified application parameters are generally valid values and must not be used simultaneously with the application. An order can be placed by specifying the profile type, material and specified housing design dimensions.

Our applied technical advice, either oral, written or through tests is given according to our best knowledge. However, this information is to be considered as non-obligatory instruction, also in terms of any protective rights of a third party, and does not exempt you from testing our product in reference to its suitability for the intended process and purpose. Utilisation, application and processing of the products occur entirely outside of our control and are therefore exclusively your responsibility. However, should a case of liability come into question, it will be limited to all damages in the value of the product which we delivered and you used. By all means, we do warrant the impeccable quality of our products in accordance with our general sales and delivery conditions.