




trygonal

Wiper TA08A

Hydraulics/Pneumatics, single acting


Housing design

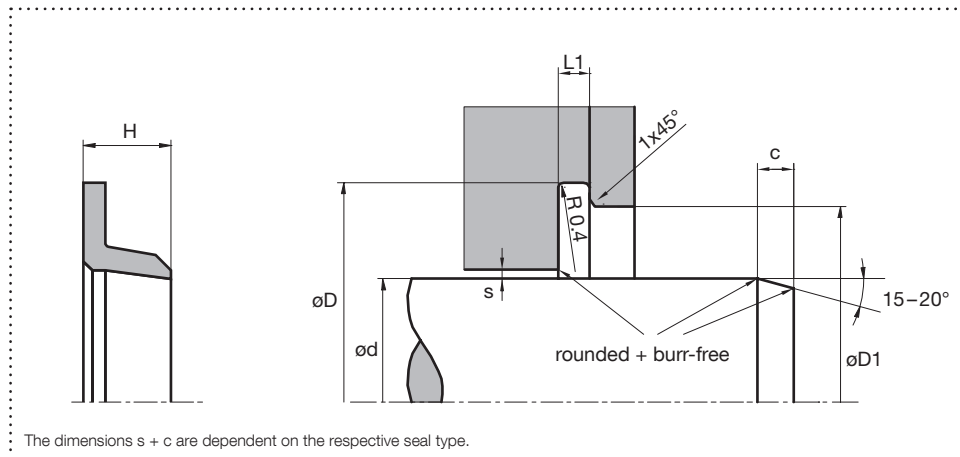

Design

- Wiper for clamping and fixing
- Use in older hydraulics/ pneumatics applications
- Version with chamfer
- Pressure build-up on the back should be avoided

Application



Brightened symbols:
Seal only for limited use.
Please contact us.

Surface finish

| Roughness | Rtmax (µm) | Ra (µm) | Material portion |
|-----------------|------------|-----------|---|
| Sliding surface | ≤ 2,5 | 0,1 – 0,5 | Ratio contact area: 50 – 95% at a cutting depth of 0.5 x Rz starting from Cref = 0% |
| Groove base | ≤ 6,3 | ≤ 1,6 | |
| Groove flanks | ≤ 15 | ≤ 3 | |

Standard dimensions

Smallest nominal inside diameter $\varnothing d \geq 6\text{mm}$

This is not a standard profile and serves only as a replacement in already existing installation spaces.
If possible, standard profiles should be used.

Material and application parameters

| Sealing element | Temperature (°C) | max. sliding speed (m/s) |
|-----------------|------------------|--------------------------|
| HPU premium | -30 – +110 | 4 |
| HPU diet | -20 – +110 | 4 |
| HPU lubric | -20 – +110 | 5 |
| HPU taiga | -50 – +110 | 4 |
| XHPU solid | -30 – +110 | 4 |
| XHPU lubric | -20 – +110 | 5 |
| NBR standard | -30 – +100 | 4 |
| FPM diet br | -20 – +200 | 4 |
| EPDM spring | -50 – +150 | 4 |
| HNBR diet | -25 – +150 | 4 |
| AFLAS® standard | -10 – +200 | 4 |

The specified application parameters are generally valid values and must not be used simultaneously with the application.
An order can be placed by specifying the profile type, material and specified housing design dimensions.

Our applied technical advice, either oral, written or through tests is given according to our best knowledge. However, this information is to be considered as non-obligatory instruction, also in terms of any protective rights of a third party, and does not exempt you from testing our product in reference to its suitability for the intended process and purpose. Utilisation, application and processing of the products occur entirely outside of our control and are therefore exclusively your responsibility. However, should a case of liability come into question, it will be limited to all damages in the value of the product which we delivered and you used. By all means, we do warrant the impeccable quality of our products in accordance with our general sales and delivery conditions.