




trygonal

Piston Seal TK09F

Hydraulics, double acting

Housing design

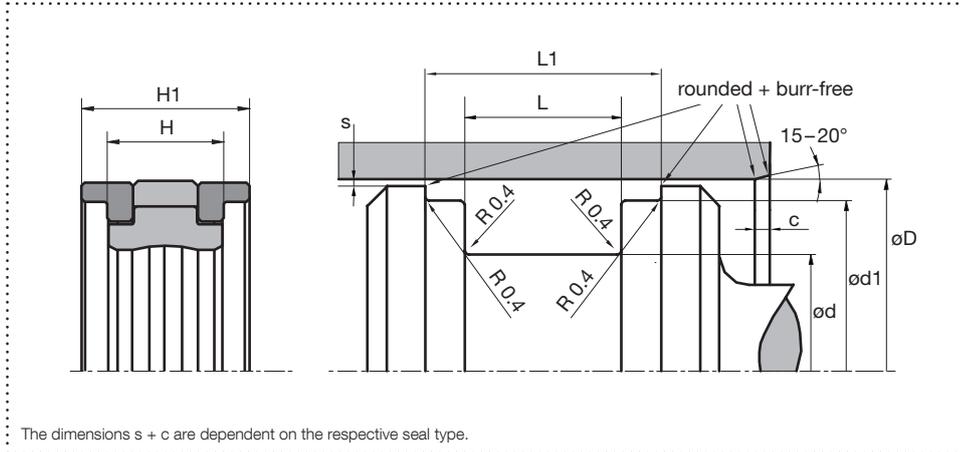

The dimensions s + c are dependent on the respective seal type.

Design

- Preload element supported PTFE compact piston seal with guide elements
- Low friction and good thermal and chemical resistance
- Very wear-resistant and easy to install

Application

linear

static

Brightened symbols:
Seal only for limited use.
Please contact us.

Surface finish

Roughness	Rtmax (µm)	Ra (µm)	Material portion
Sliding surface	≤ 2,5	0,1 – 0,5	Ratio contact area: 50 – 95% at a cutting depth of 0.5 x Rz starting from Cref = 0%
Groove base	≤ 6,3	≤ 1,6	
Groove flanks	≤ 15	≤ 3	

Standard dimensions

øD H9 (mm)	ød h9 (mm)	ød1 h8 (mm)	L+0,2 (mm)	L1 (mm)	H (mm)	H1 (mm)	c (mm)	s ¹ (mm)
≥ 20 – < 50	D – 10	D – 3	12,5	20,5	11,2	19,1	4	0,35
≥ 50 – < 80	D – 15	D – 4	20	28	17,9	26,1	5	0,50
≥ 80 – < 150	D – 20	D – 5	25	36	22,4	33,6	6	0,65
≥ 150 – < 400	D – 25	D – 6	32	46	28,7	43,0	8,5	0,78
≥ 400 – ≤ 650	D – 30	D – 8	36	50	32,3	46,7	10	1,00

¹The specified extrusion gap is valid up to 70 °C, higher temperatures require lower values.

Material and application parameters

Sealing element	Preload element	Support ring	Temp. (°C)	max. sliding speed (m/s)	max. pressure ²
XHPU solid	NBR standard	POM/PA6G ³	-30 – +100	1	400 bar (40 Mpa)
XHPU lubric	NBR standard	POM/PA6G ³	-30 – +100	1,2	400 bar (40 Mpa)
PTFE glass wear	NBR standard	POM/PA6G ³	-30 – +100	1,5	400 bar (40 Mpa)
PTFE bronze wear	NBR standard	POM/PA6G ³	-30 – +100	1,5	400 bar (40 Mpa)
PTFE carbon slide	NBR standard	POM/PA6G ³	-30 – +100	1,5	400 bar (40 Mpa)
PTFE glass wear	FPM diet br	Peek nature diet	-20 – +200	1,5	400 bar (40 Mpa)
PTFE bronze wear	FPM diet br	Peek nature diet	-20 – +200	1,5	400 bar (40 Mpa)
PTFE carbon slide	FPM diet br	Peek nature diet	-20 – +200	1,5	400 bar (40 Mpa)

² Pressure values as a function of the gap dimension. ³ ≤ ø280mm: POM ; > ø280mm: PA6G

The specified application parameters are generally valid values and must not be used simultaneously with the application. An order can be placed by specifying the profile type, material and specified housing design dimensions.

Our applied technical advice, either oral, written or through tests is given according to our best knowledge. However, this information is to be considered as non-obligatory instruction, also in terms of any protective rights of a third party, and does not exempt you from testing our product in reference to its suitability for the intended process and purpose. Utilisation, application and processing of the products occur entirely outside of our control and are therefore exclusively your responsibility. However, should a case of liability come into question, it will be limited to all damages in the value of the product which we delivered and you used. By all means, we do warrant the impeccable quality of our products in accordance with our general sales and delivery conditions.